



**Mounting:**  
recessed into ceiling  
**Housing:**  
aluminum/ die-cast aluminum  
**Finish options:**  
01-white matte  
**Note:**  
\* Other RAL colors available on request

**LED:** COB (Citizen)  
**CRI:** Ra>90  
**CCT:**  
CT27-2700k  
CT30-3000k  
**Note:**  
\* Other CCT available on request

**LED driver:** remote  
**Volt AC:** 220-240V  
**LED driver options:**  
ND - non-dimmable  
PH - phase dimmable  
010V - 0-10V dimmable  
DALI - compatible  
**Note:** \*Lm given in data is based on 3000k


**Areas of use:**  
indoors:  
public/ private/ residential  
show-rooms  
hotels  
offices



Ref Code	Watt	mA	kg
16.06.008.01.07	7W	180	0.14

**Beam Angle-Code:**



- 15°-BA15
- 25°-BA25
- 36°-BA36
- 60°-BA60



Ref Code	Watt	mA	kg
16.06.009.01.14	2x7W	180	0.43

**Beam Angle-Code:**

- 15°-BA15
- 25°-BA25
- 36°-BA36
- 60°-BA60

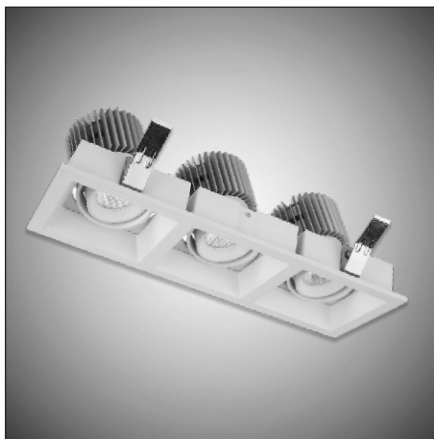

Ref Code	Watt	mA	kg
16.06.010.01.21	3x7W	480	0.64

**Beam Angle-Code:**

- 15°-BA15
- 25°-BA25
- 36°-BA36
- 60°-BA60