



Mounting: recessed into ceiling
Housing: die-cast aluminum
Reflector:
 Mirror polished aluminum
Trim color options:
 01-white matte
 11-black matte
 * other RAL colors available on request


LED: COB
CRI: Ra>90 (±3000k)
CCT:
 CT27-2700k
 CT30-3000k

LED driver: remote
Volt AC: 220-240V
Frequency: 50-60Hz
LED driver options:
 ND - non-dimmable
 PH - phase dimmable
 010V - 0-10V dimmable
 DALI - compatible

Areas of use:
 indoors:
 public/private/residential
 show-rooms
 hotels
 offices

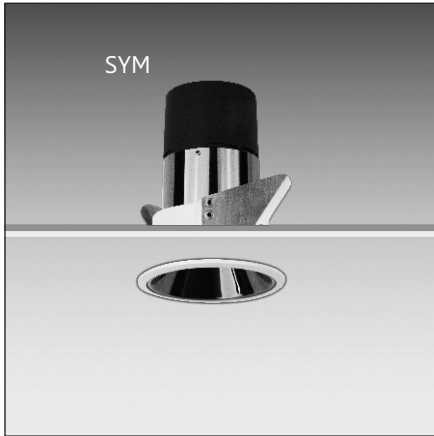

Ref Code	Watt	Lm
03.06.143.01.07	7W	407
03.06.143.02.10	10W	581
03.06.143.03.13	13W	755



Beam Angle-Code:
 25°-BA25
 30°-BA30
 38°-BA38
 50°-BA50

