




**Mounting:**  
ceiling surface  
**Housing:**  
white polycarbonate  
**Diffuser:**  
opal polycarbonate

**LED:** PCB  
**CRI:** Ra>80 (±3000K)  
**CCT:**  
CT30-3000K  
CT40-4000K  
CT45-4500K  
CT60-6000K  
**Note:** \* Lm given in data is based on 3000K



**LED driver:** integral  
**Volt AC:** 220-240V  
**Frequency:** 50-60Hz  
**LED driver options:**  
ND - non-dimmable  
PH - phase dimmable  
010V - 0-10V dimmable  
DALI - compatible

**Application:**  
indoors  
outdoors  
public/private/residential  
staircase areas/balconies  
utility/service rooms  
standard rooms

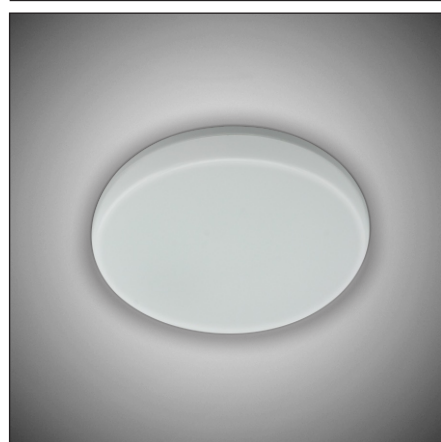

Ref Code	Watt	Lm(±)	Dia
22.38.130.01.12	12W	1000	225
22.38.131.01.20	20W	1600	280
22.38.132.01.24	24W	1920	330
22.38.132.02.36	36W	2880	330

**Beam Angle:** 117°



Ref Code	Watt	Lm(±)	LxL
22.38.133.01.12	12W	1000	225x225
22.38.134.01.20	20W	1600	280x280
22.38.135.01.24	24W	1920	330x330

**Beam Angle:** 117°