



Mounting: recessed into ceiling
Housing: aluminum alloy
Diffuser:
 - clear toughened glass
Finish options:
 01-white matte
 11-black matte
 13-grey matte

LED: COB (Citizen)
CRI: Ra>90
CCT:
 CT27-2700k
 CT30-3000k
 CT40-4000k
 CT50-5000k
 CT60-6000k

LED driver: remote
Volt AC: 220-240V
LED driver options:
 ND - non-dimmable
 PH - phase dimmable
 010V - 0-10V dimmable
 DALI - compatible
Note: *Lm given in data is based on 3000k



Areas of use:
 indoors:
 public/private/residential
 show-rooms
 corridors
 offices

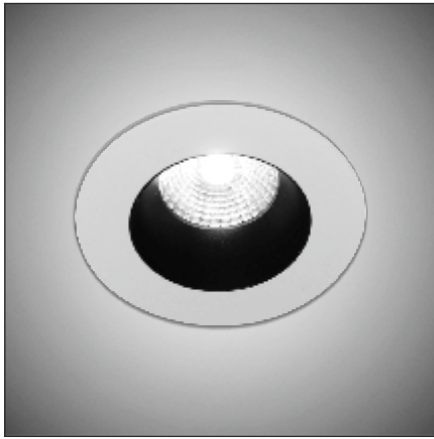

Ref Code	Watt	mA	Lm(±)
03.05.116.01.10	10W	500	850

Beam Angle-Code:


- 24°-BA24
- 36°-BA36
- 60°-BA60

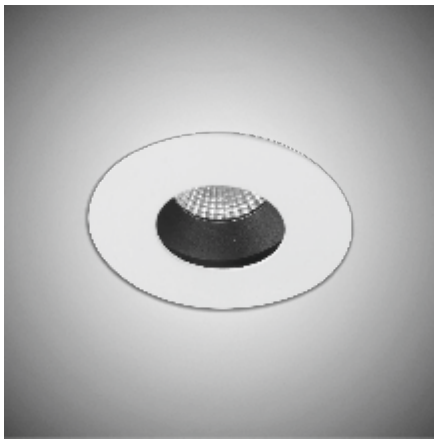

Ref Code	Watt	mA	Lm(±)
03.05.117.01.10	10W	500	680

Beam Angle-Code:

- 24°-BA24
- 36°-BA36
- 60°-BA60



Ref Code	Watt	mA	Lm(±)
03.05.118.01.13	13W	350	1400

Beam Angle-Code:

- 15°-BA15
- 24°-BA24
- 38°-BA38
- 60°-BA60