



Mounting:
recessed into ceiling
Housing:
aluminum/die-cast aluminum
Finish options:
01-white matte
15- silver matte
Note:
* Other RAL colors available on request

LED: COB (Citizen)
CRI: Ra>90
CCT:
CT27-2700k
CT30-3000k
CT40-4000k
Note:
* Other CCT available on request

LED driver: remote
Volt AC: 220-240V
LED driver options:
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible
Note: *Lm given in data is based on 3000k

Areas of use:
indoors:
public/private/residential
show-rooms
hotels
offices

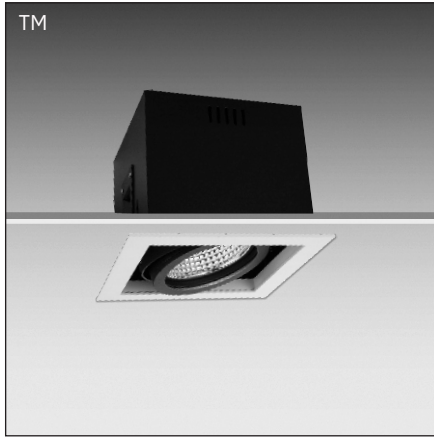


Ref Code	Watt	mA
16.06.011.01.20	1x20W	480




Note: * mention in the code option with trim (TM) or without trim (TML)

Beam Angle-Code:

- 8°-BA08
- 24°-BA24
- 36°-BA36
- 60°-BA60




Ref Code	Watt	mA	kg
16.06.012.01.40	2x20W	480	2.96




Beam Angle-Code:

- 8°-BA08
- 24°-BA24
- 36°-BA36
- 60°-BA60



Ref Code	Watt	mA	kg
16.06.013.01.60	3x20W	480	3.62



Beam Angle-Code:

- 8°-BA08
- 24°-BA24
- 36°-BA36
- 60°-BA60

