



item: LED Ceiling Light
Mounting: suspended/ surface mounted/ recessed
Housing: aluminum
Diffuser: opal polycarbonate
Light distribution: Direct (Default), Indirect or Direct+Indirect
Finish options: 15-silver grey matte
Notes:

* other RAL color available on request
 * other dimensions available on request

Volt AC: 100-240V
Frequency: 50/60Hz
CCT: 2800K-3000K/ 3700K-4200K/ 5600K-6500K
LED driver options:
 ND - non-dimmable
 PH - phase dimmable
 010V - 0-10V dimmable
 DALI - compatible



Ref code:	Watt	DiaxH	Lm
55.49.01.05.004.20	20W	400x88	1800
55.49.01.05.005.40	40W	600x88	3500
55.49.01.05.006.50	50W	650x88	4400
55.49.01.05.007.76	76W	950x88	6700
55.49.01.05.008.102	102W	1500x100	9000
55.49.01.05.009.284	284W	1800x100	25000

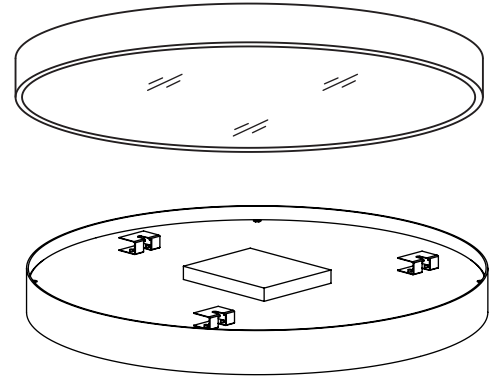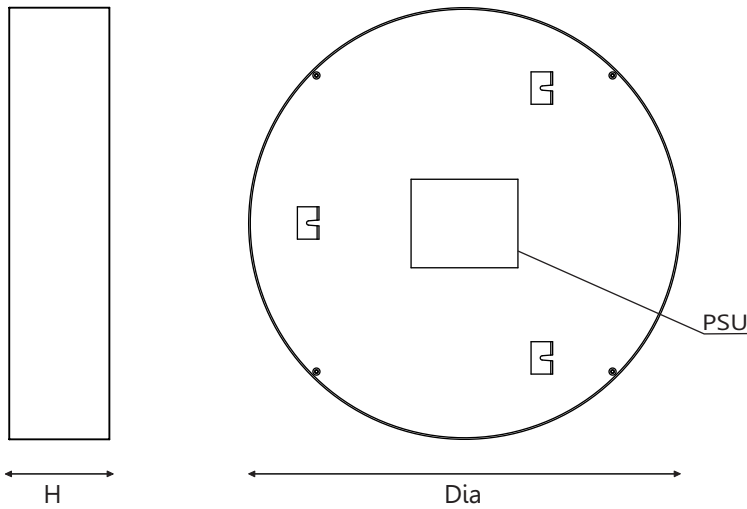

Please, mention in the code mounting type:

Suspended (HNG)

Recessed (RCS)

Surface-mounted (SFM)

