

Mounting:
surface mounted into ceiling/ wall

Housing:
- die-cast aluminum
- polycarbonate

Diffuser: polycarbonate

Finish options:
01-white matte
11-black matte
13-grey matte

LED:
- SMD3030
- Philips lumileds LUXEON 3030

CRI: Ra > 70/80

CCT:
CT40-4000k
CT50-5000k

Note: *Other CRI/CCT available on request

LED driver: integral


Volt AC: 220-240V

LED driver options:
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible


Note: *Lm given in data is based on 3000k

Areas of use:
outdoors
with high dust and humidity areas
parking areas
ware-houses, stores


Ambient Temp: -40° ~ +55°C




Ref Code	Watt	Lm(±)	LxHxW
22.52.029.01.45	45W	4500	243x243x78
22.52.029.02.70	70W	7700	243x243x78
22.52.029.03.18	18W	1000	243x243x78
22.52.029.04.23	23W	1300	243x243x78
22.52.030.01.90	90W	11000	315x315x100
22.52.030.02.135	135W	13200	315x315x100




***Note:**
Microwave motion sensor is available






Ref Code	Watt	Lm(±)	LxHxW	LED Qty
22.52.031.01.45	45W	4950	133x93x73	60 pcs
22.52.031.02.70	70W	7700	133x93x73	78 pcs
22.52.032.01.90	90W	9900	190x120x100	108 pcs
22.52.032.02.135	135W	14850	190x120x100	120 pcs



***Note:**
Microwave motion sensor is available



Ref Code	Watt	Lm(±)	LED Qty
22.52.033.01.24	24W	2400	30 pcs

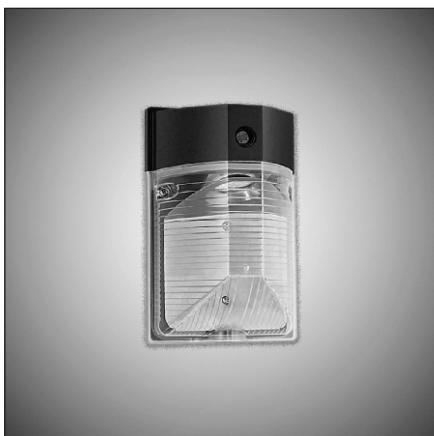

Ref Code	Watt	Lm(±)	LED Qty
22.52.034.01.24	24W	2640	30 pcs

